

CORDLESS POLE HEDGE TRIMMER



CAUTION: Before using this tool, please read this manual completely, and follow all operating safety measures.

SAFETYASSEMBLYOPERATIONMAINTENANCE

Senix Australia Pty Ltd. 32/3 Westside Avenue, #Port Melbourne, Victoria, 3207 For customer support, please call 1300 461 825 or email us at info@senixtool.com

TABLE OF CONTENTS

| SAFETY & INTERNATIONAL SYMBOLS | 2 |
|--------------------------------|----|
| SAFETY INSTRUCTIONS | З |
| KNOW YOUR UNIT | 7 |
| SPECIFICATIONS | 8 |
| ASSEMBLY | 8 |
| OPERATION | 9 |
| MAINTENANCE | 13 |
| TROUBLESHOOTING | 15 |

SAFETY & INTERNATIONAL SYMBOLS

Explanation of safety & international symbols describes safety and international symbols and pictographs that may appear on this product. Read the operator's manual for complete safety, assembly, operating and maintenance and repair information.



Caution / Warning.



To reduce the risk of injury, user must read instruction manual.



Wear eye protection.



Wear a dust mask.



Wear eye and head protection.



Wear safety footwear.



Wear protective gloves.



Wear hearing protection.



Do not use in rain or wet conditions.



DANGER - Keep hands away from blade.



Warning: cutting means continues to run after the motor is switched off.



Keep sufficient distance away from electrical power lines.



Do not dispose of battery packs in rivers or immerse in water.



Do not dispose of battery packs in fire. They will explode and cause injury.



Use and store the battery at a temperature below 50°C (122°F)



Do not disassemble, crush, heat above 100°C (212°F); Never expose the battery to microwaves or high pressures.



Keep bystanders a safe distance away from the work area.



Indoor use only. Only use battery charger indoors.



RCM Mark

EN - 2 SENIX.COM.AU

SAFETY INSTRUCTIONS

GENERAL POWER TOOL SAFETY WARNINGS



WARNING!

Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

- 1. Work Area Safety
- a. **Keep work area clean and well lit.** *Cluttered or dark areas invite accidents.*
- b. Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.

 Power tools create sparks which may ignite the dust or fumes.
- c. Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control of the tool or workpiece.
- 2. Electrical Safety
- a. Power tool plugs must match the outlet.

 Never modify the plug in any way. Do
 not use any adapter plugs with earthed
 (grounded) power tools. Unmodified
 plugs and matching outlets will reduce risk
 of electric shock.
- b. Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.

 There is an increased risk of electric shock if your body is earthed or grounded.
- c. Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
- d. Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- e. When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for

- outdoor use reduces the risk of electric shock.
- f. If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.

 Use of an RCD reduces the risk of electric shock.

NOTE The term "residual current device (RCD)" can be replaced by the term "ground fault circuit interrupter (GFCI)" or "earth leakage circuit breaker (ELCB)".

- 3. Personal Safety
- a. Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.
- b. Use personal protective equipment.
 Always wear eye protection. Protective
 equipment such as a dust mask, non-skid
 safety shoes, hard hat or hearing protection
 used for appropriate conditions will reduce
 personal injuries.
- c. Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch or energizing power tools that have the switch on invites accidents.
- d. Remove any adjusting key or wrench before turning the power tool on.

 A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
- e. Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.
- f. Dress properly. Do not wear loose clothing or jewelry. Keep your hair and clothing away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.
- g. If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.
- h. Do not let familiarity gained from

SENIX.COM.AU 3 - EN

frequent use of tools allow you to become complacent and ignore tool safety principles. A careless action can cause severe injury within a fraction of a second.

- 4. Power Tool Use And Care
- a. Do not force the power tool. Use the correct power tool for your application.

 The correct power tool will do the job better and safer at the rate for which it was designed.
- b. **Do not use the power tool if the switch does not turn it on and off.** Any power tool
 that cannot be controlled with the switch is
 dangerous and must be repaired.
- c. Disconnect the plug from the power source and/or remove the battery pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.
- d. Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.
- e. Maintain power tools and accessories.
 Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
- f. **Keep cutting tools sharp and clean.**Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
- g. Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from those intended could result in a hazardous situation.
- h. Keep handles and grasping surfaces dry, clean and free from oil and grease.

 Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.

- 5. Battery Tool Use And Care
- a. Recharge only with the charger specified by the manufacturer. A charger that is suitable for one type of battery pack may create a risk of fire when used with another battery pack.
- b. Use power tools only with specifically designated battery packs. Use of any other battery packs may create a risk of injury and fire.
- c. When battery pack is not in use, keep it away from other metal objects such as paper clips, coins, keys, nails, screws or other small metal objects that can make a connection from one terminal to another. Shorting the battery terminals together may cause burns or a fire.
- d. Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, seek additional medical help. Liquid ejected from the battery may cause irritation or burns.
- e. Do not use a battery pack or tool that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
- f. Do not expose a battery pack or tool to fire or excessive temperature. Exposure to fire or temperature above 100°C (212°F) may cause explosion.
- g. Follow all charging instructions and do not charge the battery pack or tool outside the temperature range specified in the instructions. Charging improperly or at temperatures outside the specified range may damage the battery and increase the risk of fire.
- 6. Service
- a. Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.
- b. **Never service damaged battery packs.**Service of battery packs should only
 be performed by the manufacturer or
 authorized service providers.



WARNING!

Only use following batteries: B20X2/B25X2/B40X2/B50X2/B60X2/B80X2 and chargers: CHX2/CHQX2/CHQX2-M-EU/CHDX2-M-EU.

EN - 4 SENIX.COM.AU

HEDGE TRIMMER SAFETY WARNINGS

- a. Do not use the hedge trimmer in bad weather conditions, especially when there is arisk of lightning. This decreases the risk of being struck by lightning.
- b. Keep all power cords and cables away from cutting area. Power cords or cables may be hidden in hedges or bushes and can be accidentally cut by the blade.
- c. Wear ear protection. Adequate protective equipment will reduce the risk of hearing loss.
- d. Hold the hedge trimmer by insulated gripping surfaces only, because the blade may contact hidden wiring. Blades contacting a "live" wire may make exposed metal parts of the hedge trimmer "live" and could give the operator an electric shock.
- e. Keep all parts of the body away from the blade. Do not remove cut material or hold material to be cut when blades are moving. Blades continue to move after the switch is turned off. A moment of inattention while operating the hedge trimmer may result in serious personal iniury.
- f. When clearing jammed material or servicing the hedge trimmer, make sure all power switches are off and the battery pack is removed or disconnected. Unexpected actuation of the hedge trimmer while clearing jammed material or servicing may result in serious personal injury.
- g. Carry the hedge trimmer by the handle with the blade stopped and taking care not to operate any power switch. Proper carrying of the hedge trimmer will decrease the risk of inadvertent starting and resultant personal iniury from the blades.
- h. When transporting or storing the hedge trimmer, always use the blade cover.

 Proper handling of the hedge trimmer will decrease the risk of personal injury from the blades.

ADDITIONAL SAFETY INSTRUCTIONS FOR EXTENDED-REACH HEDGE TRIMMERS

- a. Always use head protection when operating the extended-reach hedge trimmer overhead. Falling debris can result in serious personal injury.
- b. Always use two hands when operating the extended-reach hedge trimmer. Hold the extended-reach hedge trimmer with both hands to avoid loss of control.
- c. To reduce the risk of electrocution, never use the extended-reach hedge trimmer near any electrical power lines. Contact with or use near power lines may cause serious injury or electric shock resulting in death.

EMERGENCY

Familiarise yourself with the use of this product by means of this instruction manual. Memorise the safety directions and follow them to the letter. This will help to prevent risks and hazards.

- Always be alert when using this product, so that you can recognise and handle risks early. Fast intervention can prevent serious injury and damage to property.
- Switch off and disconnect from the power supply if there are malfunctions. Have the product checked by a qualified professional and repaired, if necessary, before you operate it again.

RESIDUAL RISKS

Even if you are operating this product in accordance with all the safety requirements, potential risks of injury and damage remain. The following dangers can arise in connection with the structure and design of this product:

- Health defects resulting from vibration emission if the product is being used over long periods of time or not adequately managed and properly maintained.
- Injuries and damage to property due to broken cutting attachments or the sudden impact of hidden objects during use.
- 3. Danger of injury and property damage caused by flying objects.
- Prolonged use of this product expose the operator to vibrations and may produce 'whitefinger' disease. In order to reduce the risk, please wear gloves and keep your hands warm. If any of the 'whitefinger'

SENIX.COM.AU 5 - EN

symptoms appear, seek medical advice immediately. 'Whitefinger' symptoms include: numbness, loss of feeling, tingling, pricking, pain, loss of strength, changes in skin colour or condition. These symptoms normally appear in the fingers, hands or wrists. The risk increases at low temperatures.



WARNING!


This product produces an electromagnetic field during operation! This field may under some circumstances interfere with active or passive medical implants! To reduce the risk of serious or fatal injury, we recommend persons with medical implants to consult their doctor and the medical implant manufacturer before operating this product!

SAVE THIS INSTRUCTIONS INTENDED USE

This product is intended for outdoor use only, and must not be used inside a building under any circumstances. The cordless pole hedge trimmer is only intended for use in dry and well-illuminated conditions. This pole hedge trimmer is only intended to be used for cutting hedges, bushes and shrubs in domestic gardens. Do not cut branches exceeding the stated maximum capacity. Do not use it for others purposes.

EN - 6 SENIX.COM.AU

KNOW YOUR UNIT

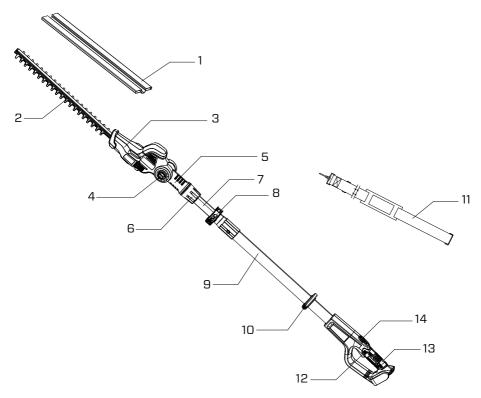

APPLICATIONS Model: HTPX2-M-EU As a pole hedge trimmer Cutting hedges, bushes and shrubs in domestic gardens.

| 1 | Blade Cover |
|---|-----------------|
| 2 | Blade |
| 3 | Cover |
| 4 | Pivot Button |
| 5 | Support |
| 6 | Locking Sleeve |
| 7 | Telescopic Pole |

| 8 | Telescopic Locking Clip | |
|----|-------------------------|--|
| 9 | Pole | |
| 10 | Bracket | |
| 11 | Shoulder Strap | |
| 12 | Trigger Switch | |
| 13 | Handle | |
| 14 | Safety Lock Button | |

SENIX.COM.AU 7 - EN

SPECIFICATIONS

| Model | HTPX2-M-EU |
|--------------------|------------------------------|
| Rated voltage | 18 V (20 V Max*) |
| No-load speed | 2 300 spm |
| Cutting length | 450 mm |
| Tooth space | 28 mm |
| Cutting capacity | 20 mm |
| Blade thickness | 1.5 mm |
| Collapsing height | 1.85 - 2.35 m |
| Angle modulation | -60°/-30°/ 0 /30°/60°/90° |
| Weight (tool only) | 3.2 kg |

*20V Max battery, maximum initial battery voltage (measured without a workload) is 20V. The nominal voltage is 18V.

ASSEMBLY

- Unpack all parts and lay them on a flat, stable surface:
- 2. Remove all packing materials and shipping devices, if applicable.
- The scope of delivery varies depending on the country and purchased variant. Model of HTPX2-M-EU
- Pole Hedge Trimmer x1
- Blade Cover x1
- Shouler Strap x1
- Instruction Manual x1
- If you find that parts are missing or show damage do not use the product but contact your dealer. Using an incomplete or damaged product represents a hazard to people and property.
- Ensure that you have all the accessories and tools needed for assembly and operation. This also includes suitable personal protective equipment.



WARNING!



Wear protective gloves for this assembly work and always lay the product on a flat and stable surface while assembling.



Follow the assembly instructions step-by-step and use the pictures provided as a visual guide to easily assemble the product! Do not insert the battery pack before the power tool is completely assembled or adjusted!


CONNECTING THE POLE AND THE TRIMMER HEAD



WARNING!

To avoid serious personal injury and damage to the unit, shut the unit off before removing or installing an attachment.


 Align the telescopic pole with the trimmer head





_Fig. 1

- Insert the telescopic pole to the locking base until the lock holes click into place.
 The grooves must be aligned with the arrow positions near the locking base.
- 3. Slide the locking sleeve to the locking base and rotate clockwise till fully tighten.

EN - 8 SENIX.COM.AU












NOTE:

Make sure the rear handle is properly aligned with the blade.

INSTALLING THE SHOULDER STRAP

- Fasten the carabiner hook onto the bracket on the pole.
- 2. Adjust the length of the strap to attain a comfortable working position.



_____Fig. 3 _____



NOTE:

In case of emergency, tug the quick-release latch on shoulder strap to release machine.


INSTALLING/REMOVING THE BATTERY PACK

To install:

Slide the battery pack into the battery docking port on the product until it clicks.

To remove:

Press the battery-release button on the battery pack and slide the battery pack out.



OPERATION



WARNING!

Always wear eye, hearing, hand, foot and body protection to reduce the risk of injury when operating this unit. Keep all parts of your body away from the rotating cutting attachment and hot surfaces.

WEARING THE SHOULDER STRAP

SENIX.COM.AU 9 - FN



WARNING!


Turn off the unit and disconnect the battery pack before putting on the shoulder strap.

- Enter your head and one arm through the shoulder strap according to your using habit. Take operation safety into account when choosing which arm to wear.
- Make sure the shoulder strap fasten firmly on the bracket and is not liable to slip down during the operation.

SWITCHING ON/OFF WARNING!

Ensure the blade does not touch any objects before turning on the pole hedge trimmer.

- To turn the tool ON, push and hold the safety lock button with your thumb and then squeeze the trigger switch with your fingers. Once the tool is running, release the safety lock button.
- 2. To turn the tool OFF, release the trigger switch.




ADJUSTING THE TELESCOPIC POLE

WARNING!Failure to lock the telescopic pole as


instructed may result in injury.

- Turn off the unit and disconnect the battery pack from the trimmer.
- 2. Open the telescopic locking clip to release the pole.



___Fig. 7 _____

3. Extend the pole to the desired length.



4. Lock the pole in position by closing the locking clip and ensure the pole is secure.


__Fig. 8 _____



_____Fig. 9

5. If the pole moves whilst the telescopic locking clip is closed, the nut on the locking clip may need tightening. Open the locking clip. Using the hex key tool, tighten the locking clip nut and then close the locking clip.

EN - 10 SENIX.COM.AU




ADJUSTING THE PIVOTING HEAD



WARNING!

Always ensure that it is locked into position before using.

- Turn off the machine and disconnect the battery pack from the trimmer before making adjustments.
- 2. Place the pole trimmer on a sturdy flat surface.
- 3. The trimmer head can be adjusted to six positions. Press the pivot button and adjust the trimmer head to the desired angle.
- 4. Ensure the trimmer head is locked in position when the button is released.



OVERHEAT PROTECTION

When the tool/battery is overheated, the tool stops automatically. In this situation, let the power tool/battery cool before turning the tool on again.

OVERDISCHARGE PROTECTION


When the battery capacity is not enough, the tool stops automatically. In this case, remove the battery from the tool and charge the battery.

USING THE POLE HEDGE TRIMMER

- Double check that the binding of accessories and attachments are properly fixed. Never use the product if any parts are in the unlocked position.
- We recommend the use of the shoulder strap at all times, to assist with distributing the weight of the machine.
- Inspect the area to be cut and remove any foreign objects that will influence your cutting. If the foreign objects can not be removed, e.g. wire fences, please mark and remember it to avoid toughing them during cutting.
- Run the machine to top speed before cutting.
- Keep your body and feet in safety distance to cutting head.
- Stand so that you are stable and balanced on both feet. This hedge trimmer is intended to be used by the operator at ground level and do not use on ladders or any other unstable support.
- The unit is used for cutting in either direction in a slow, sweeping action from side to side
- Inspect and clear the area of any hidden objects.
- To protect yourself from electrocution, do not operate within 10m (33 feet) of overhead electrical lines.
- Never use the pole hedge trimmer near power lines, fencing, posts, buildings or other immovable objects.
- Never use a blade after hitting a hard object without first inspecting it for damage. Do not use if any damage is found.
- Ensure the air vents are always unobstructed and clear. Clean them if necessary with a soft brush. Blocked air vents may lead to overheating and damaged to the trimmer.
- Do not overwork yourself. Take regular breaks to ensure you can concentrate on the work and have full control over the pole trimmer.


SENIX.COM.AU 11 - EN

 To use the pole hedge trimmer for trimming tall, hard to reach hedges or shrubs, hold the trimmer at the position shown below. Pivot the power head to several different positions to shape or sculpt shrubs or hedges.




__Fig. 12 _____

To use pole hedge trimmer for trimming the bottoms and sides of hedges and shrubs, hold the pole trimmer at the position shown below.



_Fig. 13 _

3. To use pole hedge trimmer for trimming low-lying foliage or ground cover, hold the pole hedge trimmer at the position as shown below.



__Fig. 14 _____

Do not force the pole hedge trimmer through dense growth. A slight back and forth sawing action may ease the cutting of larger, more dense growth. If the pole hedge trimmer begins to slow down, reduce the rate of speed at which you are trying to cut. If the pole hedge trimmer becomes jammed, immediately turn the trimmer off. Disconnect the battery pack and clear the jammed debris from the blades.

CUTTING TIPS



WARNING!

Always hold the pole hedge trimmer firmly with both hands. Never hold shrubs with one hand and operate pole hedge trimmer with another. Failure to follow this warning can result in serious injury.



WARNING!

Clear the area to be cut before each use. Remove all objects such as cables, lights, wire, or loose strings which can be entangled in the cutting blade and create a risk of serious injury.

- When operating the pole trimmer with an extension lead, keep the extension lead behind the pole trimmer. Never drape it over the hedge being trimmed.
- Do not force the pole hedge trimmer through heavy shrubbery. This can cause the blades to bind and slow down. If the blades slow down, reduce the pace.
- Do not attempt to cut stems or twigs that are larger than 13 mm (1/2 inch) thick or those obviously too large to feed into the cutting blade. Use a hand saw or pruning saw to trim large stems.
- If blades do become jammed, stop the motor, allow the blades to stop and disconnect the battery pack before attempting to remove the obstruction.
- Wear gloves when trimming thorny or prickly growth. When trimming new growth, use a wide sweeping action, so that the stems are fed directly into the cutting blade. Older growth will have thicker stems and will be trimmed easiest by using a sawing movement.

EN - 12 SENIX.COM.AU

MAINTENANCE



WARNING!

Remove and pull out the battery pack before maintenance!

Wear protective gloves and clothing!
Maintain this product regularly and carefully! If
the product is improperly maintained, it may
fail at its intended task, which may produce
fatal consequences.

- 1. Keep the product clean. Remove debris from it after each use and before storage.
- Regular and proper cleaning will help ensure safe use and prolong the life of the product.
- 3. Inspect the product before each use for worn and damaged parts. Do not operate it if you find broken and worn parts.



WARNING!


Only perform repairs and maintenance work according to these instructions! All further works must be performed by a qualified specialist!

LUBRICATING THE BLADE

Always allow the blades of the pole hedge trimmer to come to a stop and remove and pull out the battery pack before lubricating. Failure to do so could result in accidental starting causing possible serious personal injury.

For easier operation and longer blade life, lubricate the trimmer blade before and after each use. If you will be using the pole hedge trimmer for an extended time, it is advisable to oil the blade periodically.

- 1. Stop the pole hedge trimmer.
- 2. Remove and pull out the battery pack from the product.
- 3. Lay the pole hedge trimmer on a flat surface and apply light weight machine oil along the edge of the top blade.



| Fig. 15 |
|---------|
|---------|

SHARPENING THE BLADE

Do not sharpen the blade of the pole hedge trimmer yourself unless you are experienced in doing so. It is recommended to have the pole hedge trimmer sharpened at an authorized service location or to replace the blade once it becomes worn.

CLEANING

- Switch the product off, pull out the battery pack from the product.
- Use a small brush to clean the outside of the unit. Do not use strong detergents.
 Household cleaners that contain aromatic oils such as pine and lemon, and solvents such as kerosene, can damage plastic.
- Wipe off any moisture with a soft cloth.
- Inspect the product before and after each use for worn and damaged parts. Do not operate it if you find worn and damaged parts.



NOTE:

If the cutting blade is blocked by foreign objects during operation, stop the product, wait till the product stops entirely, then remove the foreign objects and clean the cutting blade. Clean moving parts may result in hazardous injury.

TRANSPORTATION

- Clean the product as described above.
- Always carry the product by its handle.
- Protect the product from any heavy impact or strong vibrations which may occur during transportation in vehicles.
- · Secure the product to prevent it from

SENIX.COM.AU 13 - EN

slipping or falling over, damage or injury.

STORAGE

- Clean the product as described above.
- Store the product and its accessories in a dark, dry, frostfree, well-ventilated place.
- Always store the product in a place that is inaccessible to children. The ideal storage temperature is between 10°C and 30°C.
- We recommend using the original package for storage or covering the product with a suitable cloth or enclosure to protect it against dust.



NOTE:

To prolong battery life, never store battery pack in a completely discharged condition. Make sure the battery pack is charged every six months or when the LED indicator shows only one light.

DISPOSAL

Unwanted product should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice. Users should clean up bushes generated during operation to protect environment.



Electrical products should not be discarded with household products. Used electrical products must be collected separately and disposed of at collection points provided for this purpose. Talk with your local authorities or dealer for advice on recycling.

EN - 14 SENIX.COM.AU

TROUBLESHOOTING

Suspected malfunctions are often due to causes that users can fix themselves. Therefore, troubleshoot the product using this section. In most cases the problem can be solved quickly.

| PROBLEM | POSSIBLE CAUSE | SOLUTION |
|---|---------------------------------------|--|
| Product does not start | Battery pack not properly attached | Attach properly |
| | Battery pack capacity too low | Remove and charge battery pack |
| | Battery pack damaged | Check by a specialist electrician |
| | Switch trigger not set on ON position | Refer to chapter "SWITCHING ON/OFF" |
| Product does not reach full power | Battery pack capacity too low | Charge battery pack |
| | Air vents are blocked | Clean the air vents |
| Result is unsatisfactory | Cutting attachment is worn | Replace with a new one |
| Vibration or noise is excessive | Bolts/nuts are loose | Tighten bolts/nuts |
| Product suddenly stops | Battery pack capacity too low | Remove and charge battery pack |
| | Battery too hot | Remove battery pack and let it cool down |

SENIX.COM.AU 15 - EN